


一
五
上

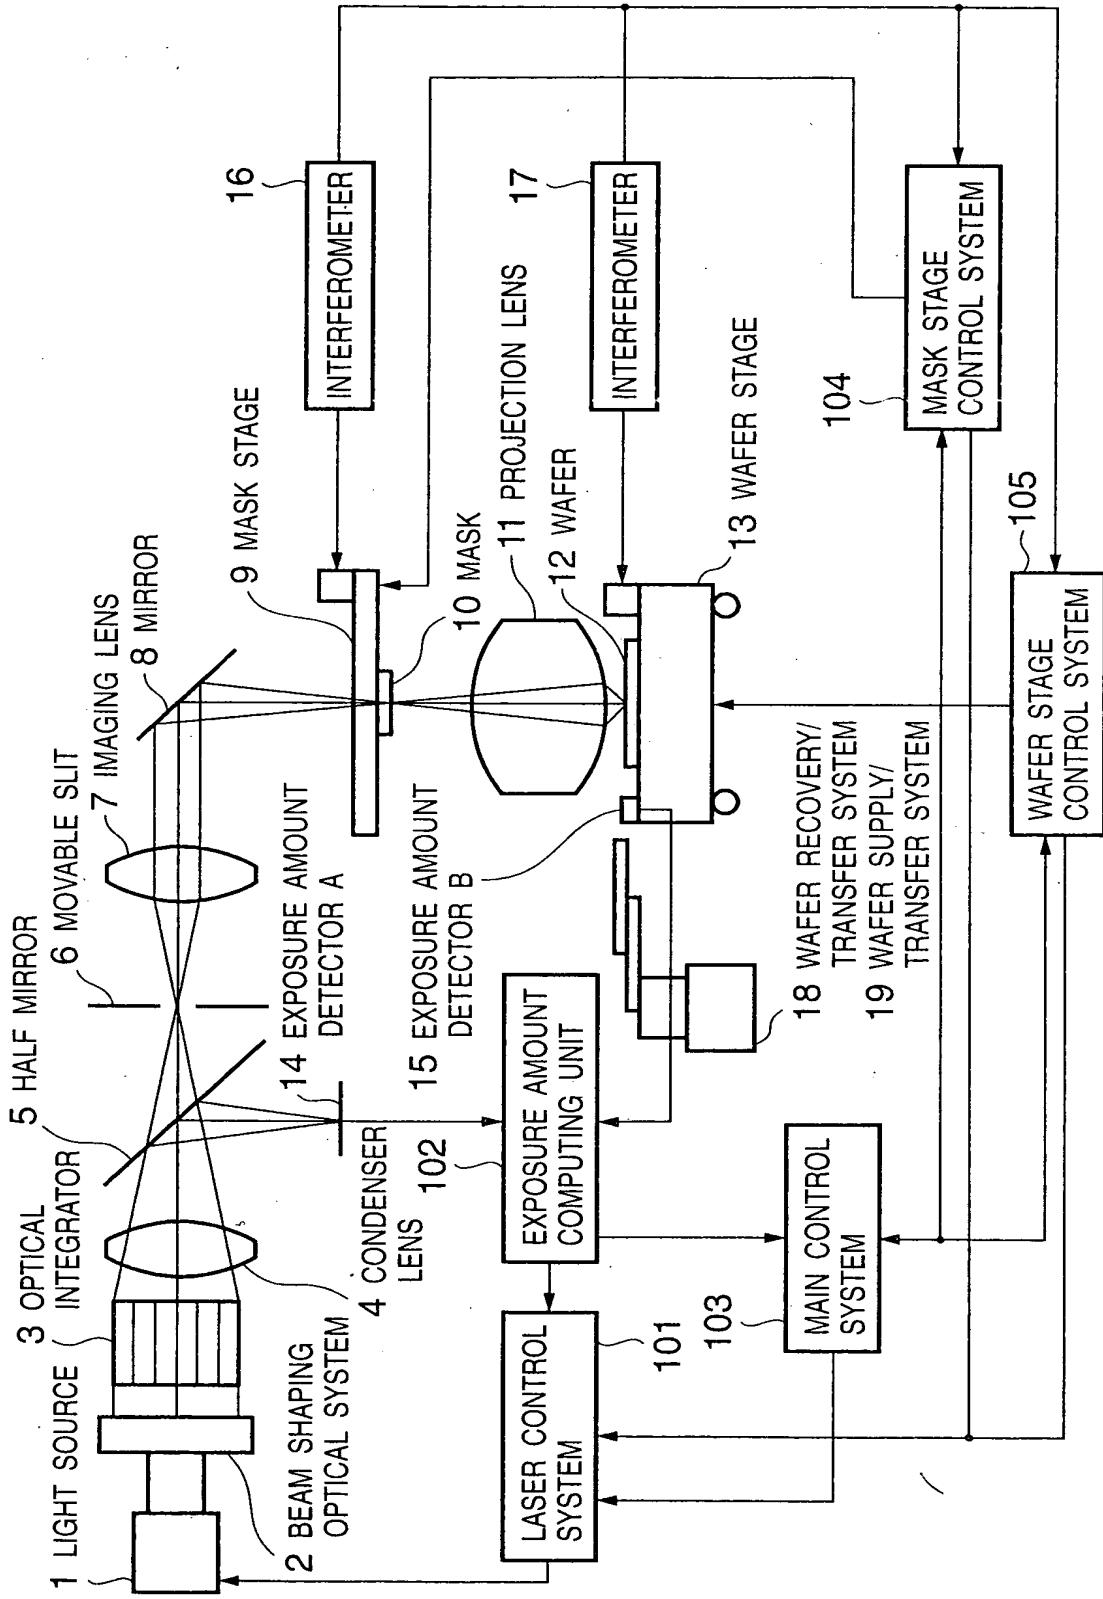

0102340.5325194960

2/12

FIG. 2

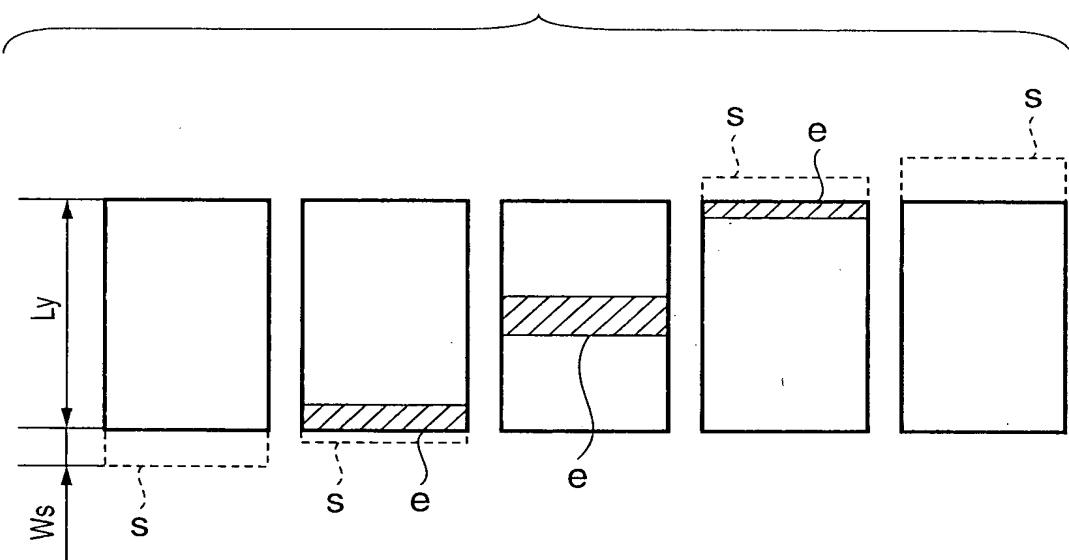


FIG. 3A

T004200-S225T6650

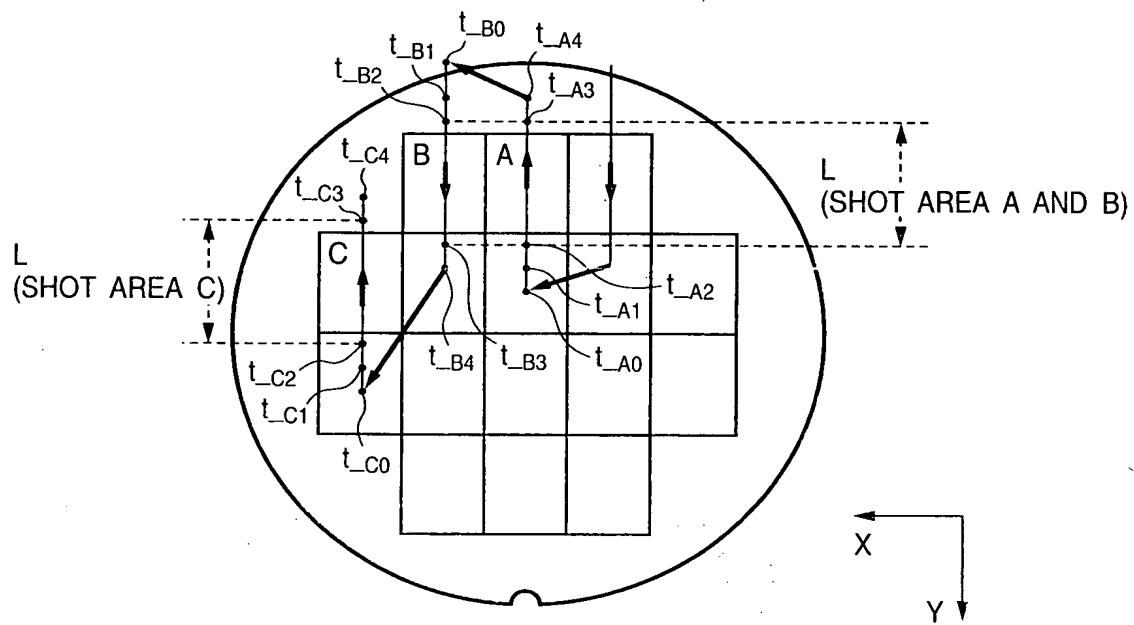


FIG. 3B

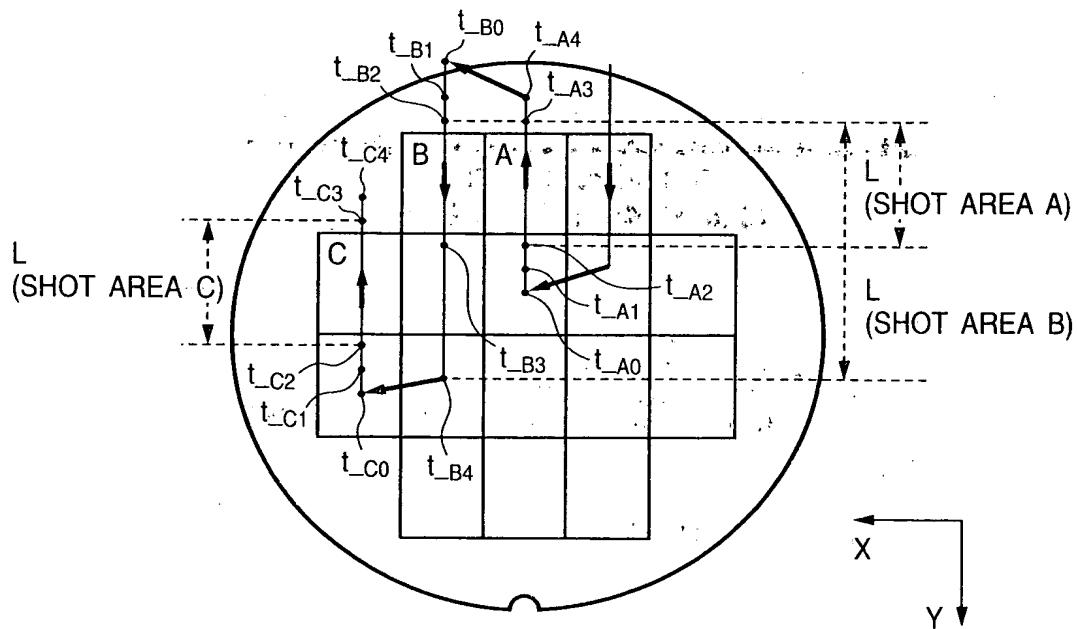


FIG. 4


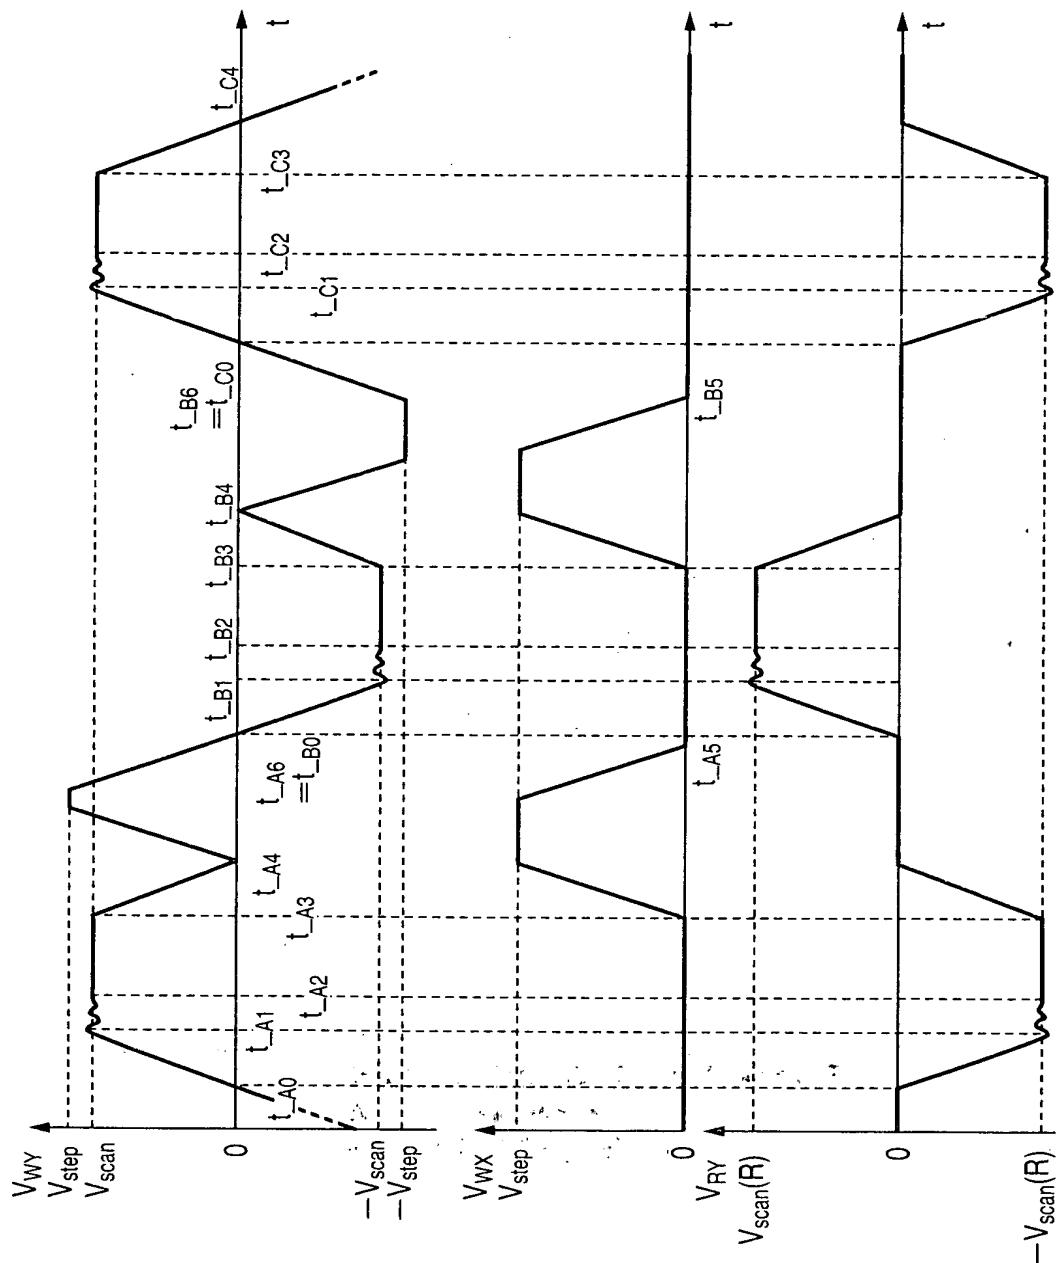


FIG. 5

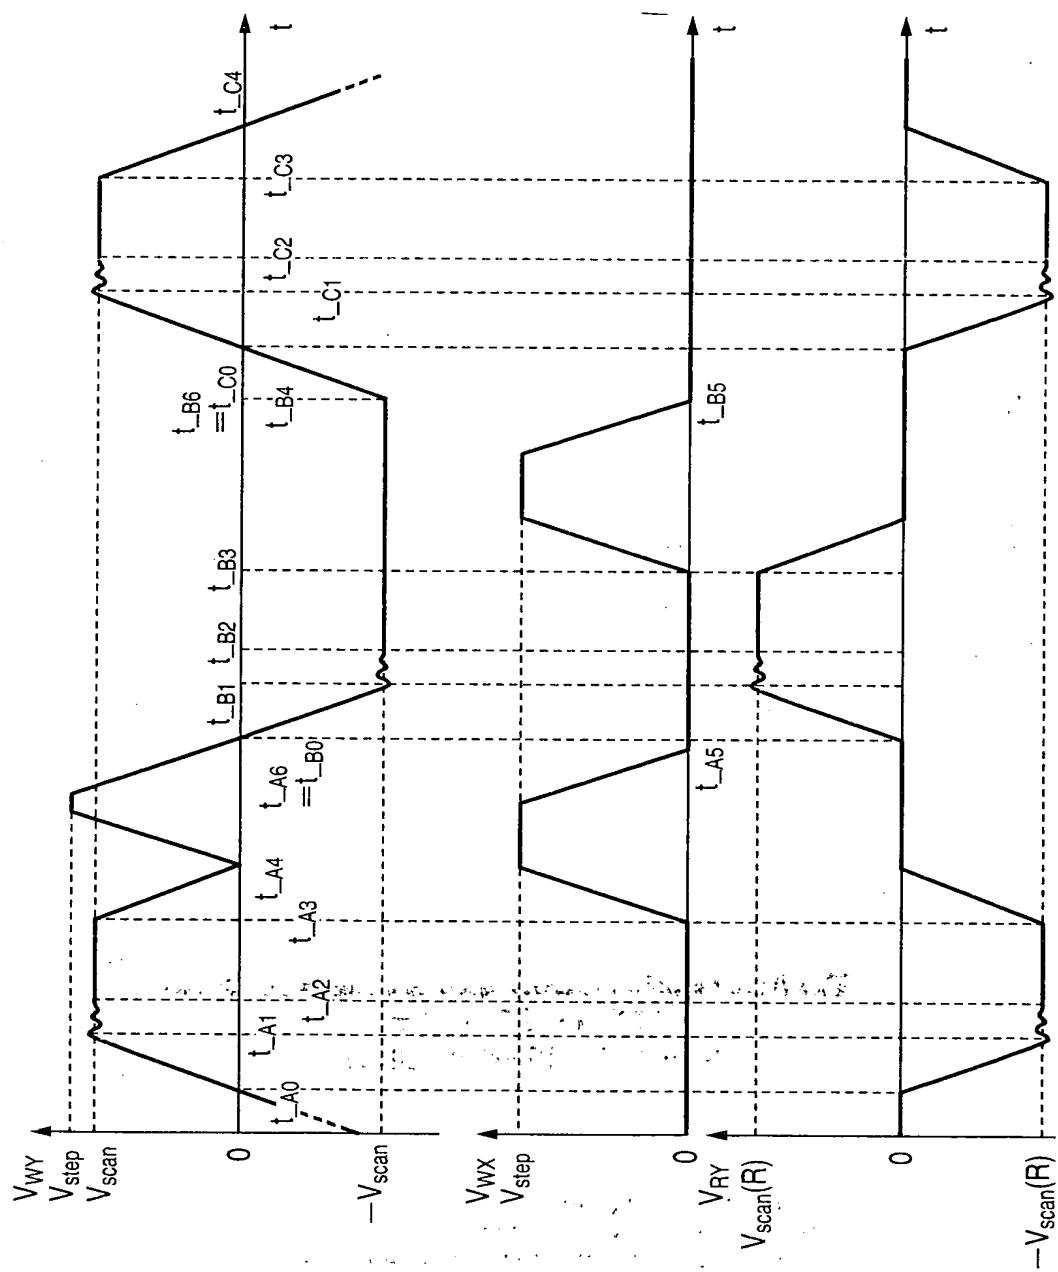

6/12

FIG. 6A

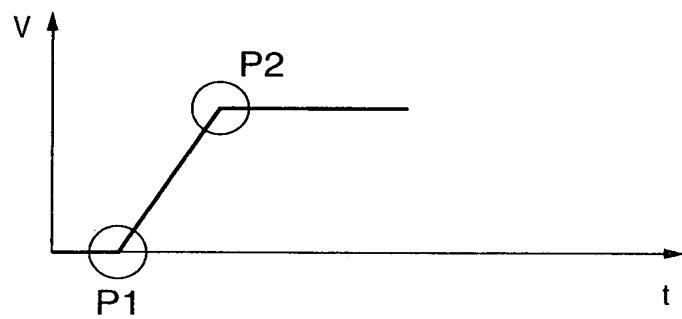


FIG. 6B

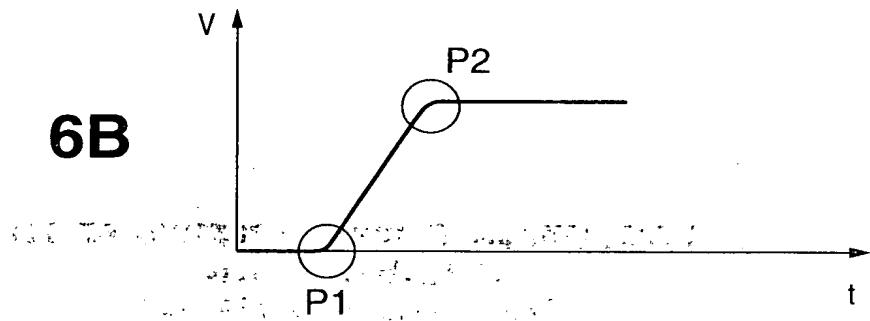


FIG. 7A

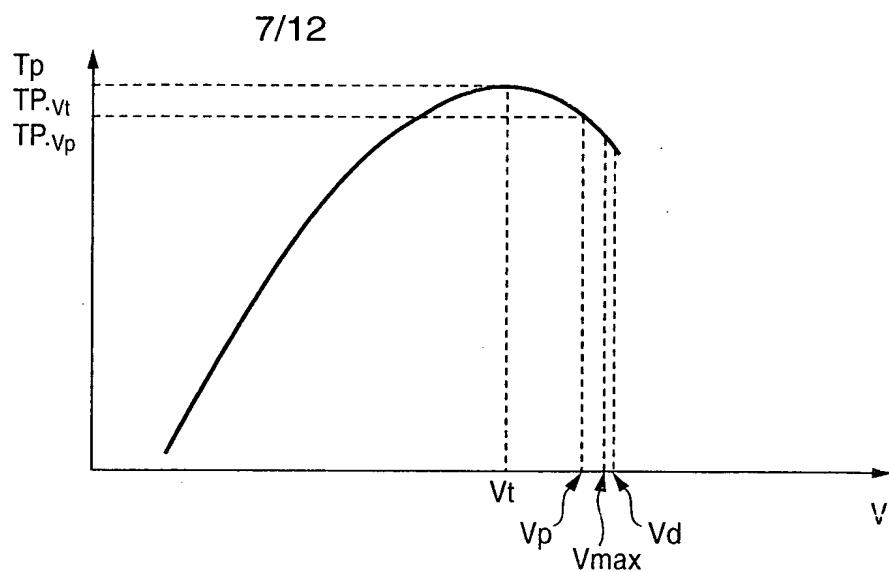


FIG. 7B

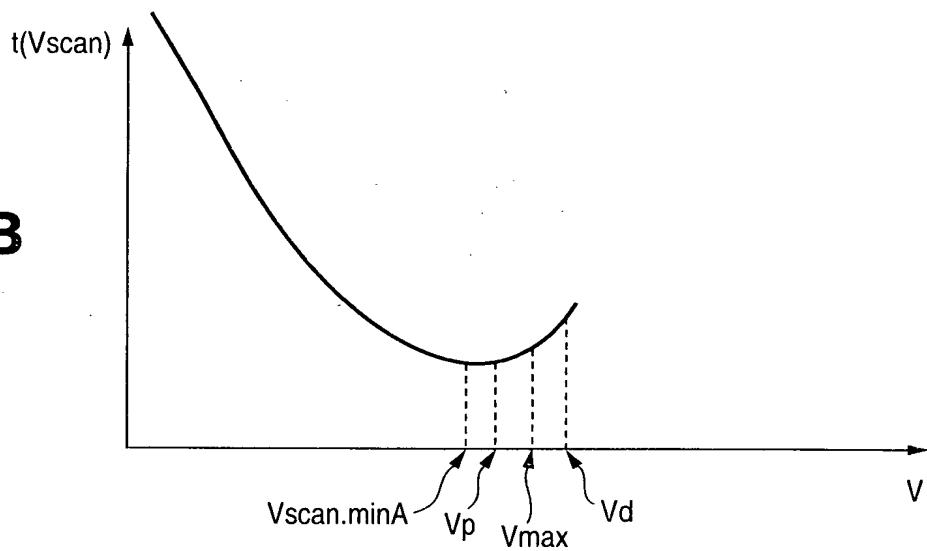


FIG. 7C

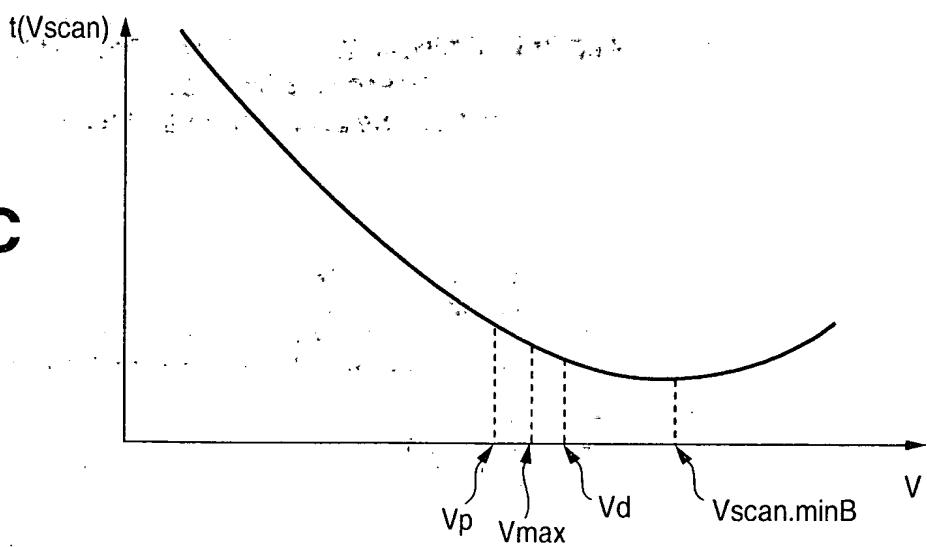


FIG. 8

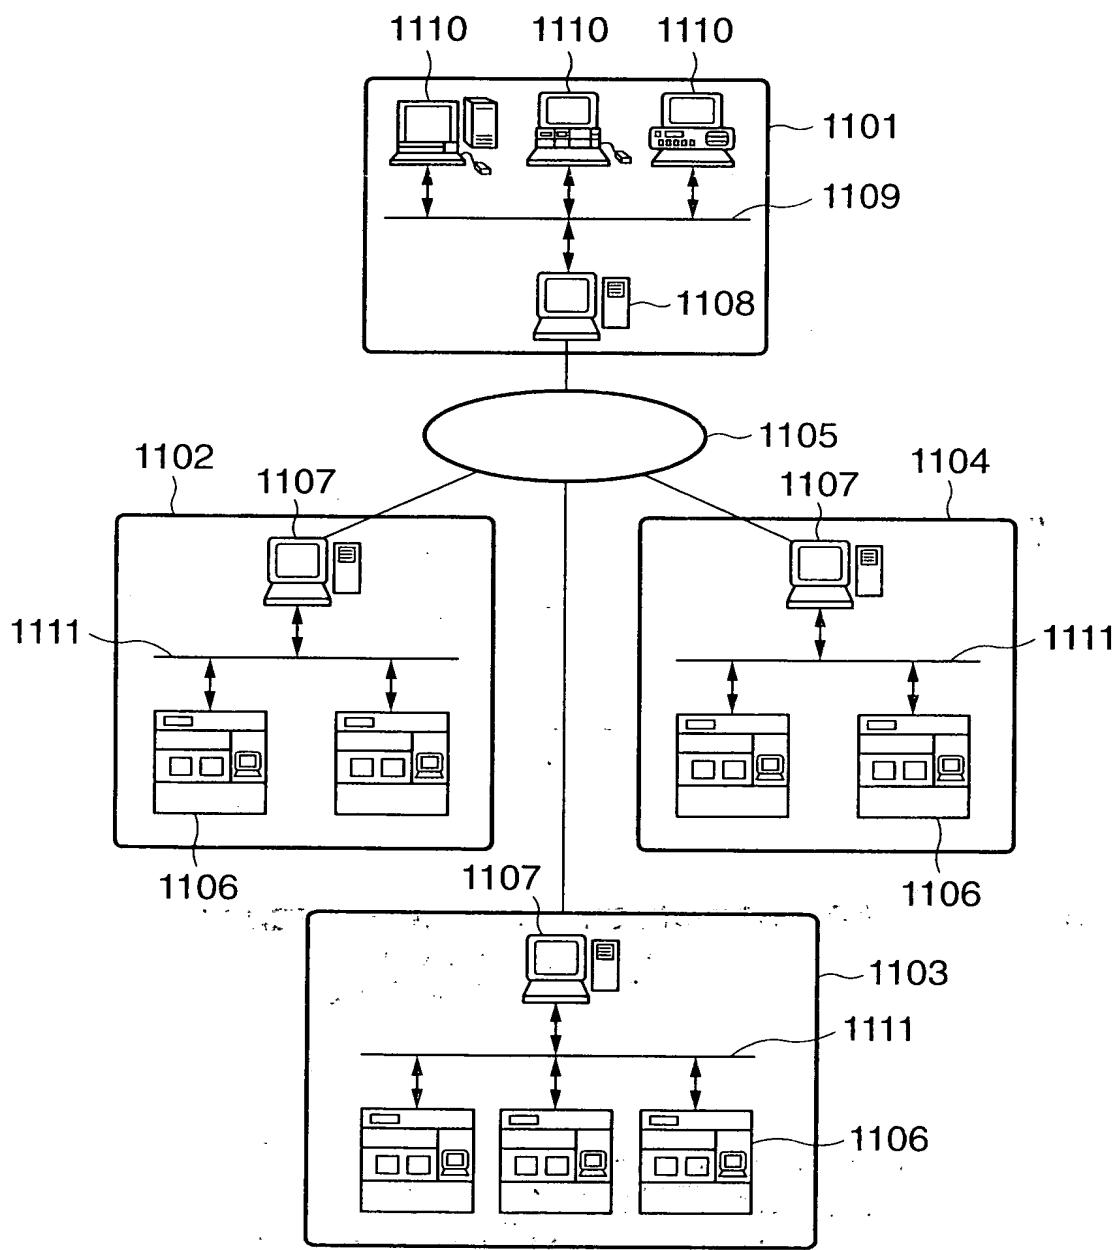


FIG. 9

12020-52557660

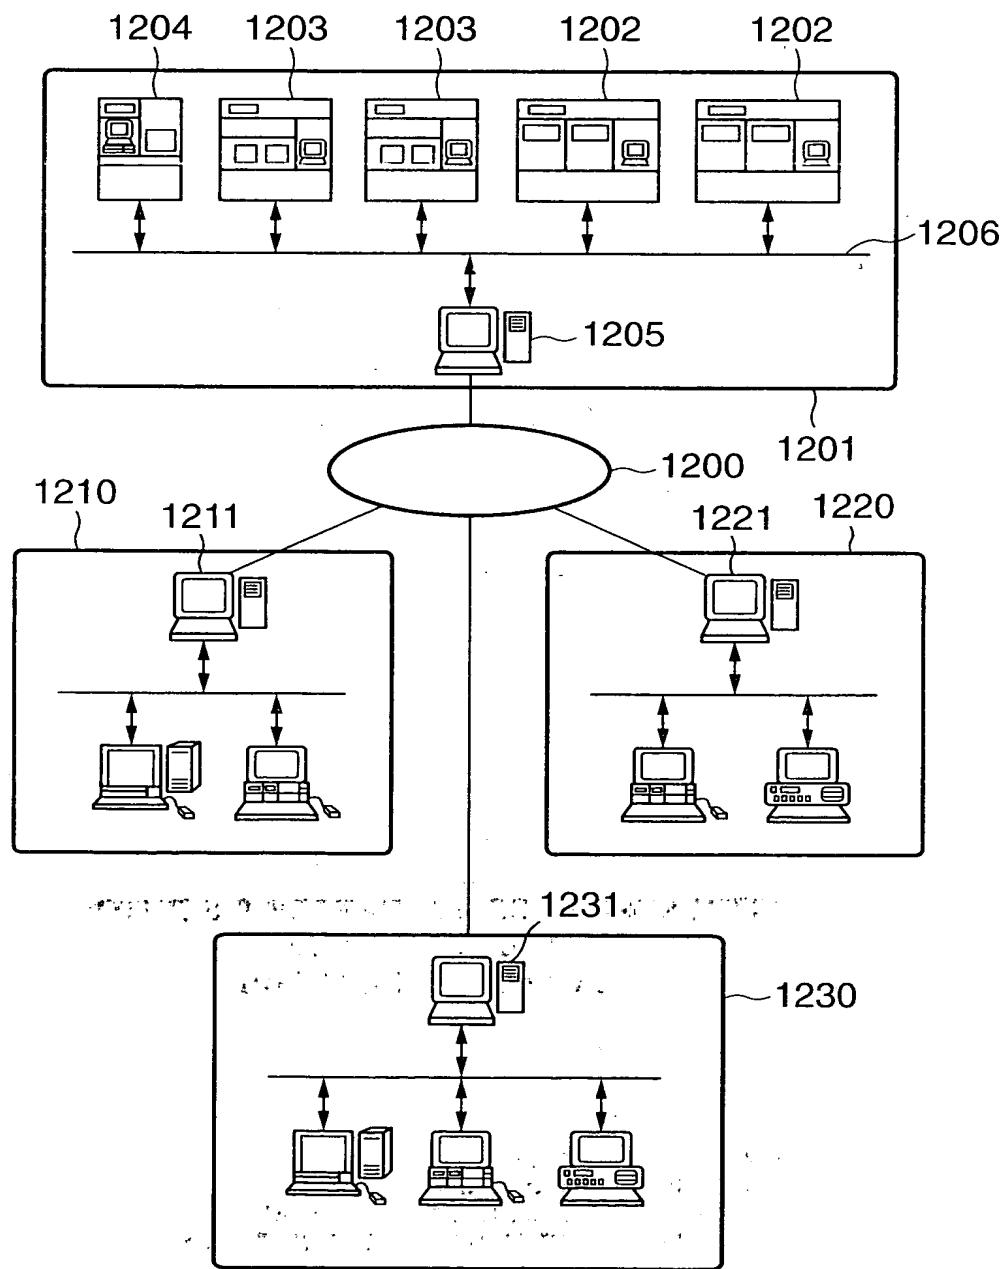


FIG. 10

URL <http://www.maintain.co.jp/db/input.html>

TROUBLE DB INPUT WINDOW

OCCURRENCE DATE 2000/3/15 ~1404

TYPE OF APPARATUS * * * * * * * * ~1401

OBJECT OPERATION ERROR (START-UP ERROR) ~1403

APPARATUS S/N 465NS4580001 ~1402

DEGREE OF URGENCY D ~1405

SYMPTOM LED KEEPS FLICKERING
AFTER POWER-ON ~1406

REMEDY POWER ON AGAIN
(PRESS RED BUTTON IN ACTIVATION) ~1407


PROGRESS INTERIM HAS BEEN DONE ~1408

1410 1411 1412

LINK TO RESULT LIST DATABASE SOFTWARE LIBRARY OPERATION GUIDE

FIG. 11

00015525-00270

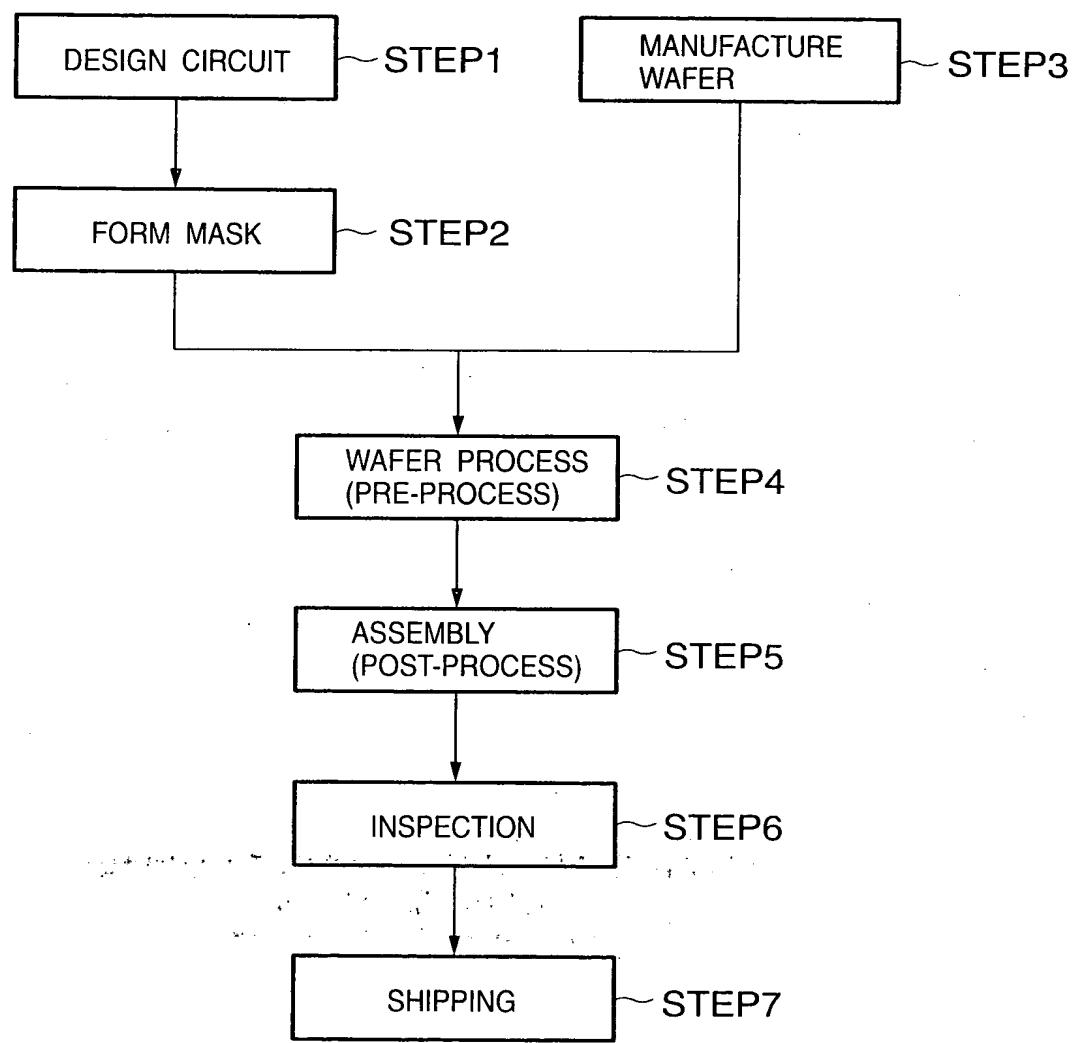

SEMICONDUCTOR DEVICE MANUFACTURING FLOW

FIG. 12

T02240-525660

